



# ACCESSORIES



MARTIN ABRASIVI can supply a range of professional sanders, spare parts and accessories, assistance and maintenance included.



## KX65B

Pneumatic random orbital sander.

- Backing pad 125 - 150 mm.
- Orbit 5 mm.
- RPM 14.000
- Weight g. 770
- Air consumption max 350 ltr/min

### APPLICATIONS:

Light and easy to handle ergonomic professional sander for woodworking and automotive.

If connected to a central vacuum system, your sanding is clean and dust-free.



| ITEM  | SIZE mm. | R.P.M. | ORBIT | PACKAGING |
|-------|----------|--------|-------|-----------|
| KX65B | 125      | 14000  | 5 mm. | 1         |
| KX65B | 150      | 14000  | 5 mm. | 1         |

## KX65G

Pneumatic random orbital sander.

- Pad 150 mm.
- Orbit 5 mm.
- Speed R.P.M. 14.000
- Weight g. 860
- Air consumption max lit./min. 350

### APPLICATIONS:

Light and easy to handle ergonomic professional sander for woodworking and automotive.

If connected to a central vacuum system, your sanding is clean and dust-free.



| ITEM  | SIZE mm. | R.P.M. | ORBIT | PACKAGING |
|-------|----------|--------|-------|-----------|
| KX65G | 150      | 14000  | 5 mm. | 1         |



# BACKING PADS FOR ORBIT SANDERS



## PLRGT150VEL6F

Soft polyurethane velcro backing-pad, 6 suction holes, 150 mm. diameter , screw fixing 5/16''.

| ITEM  | HOLES | SIZE mm. | PACKAGING |
|-------|-------|----------|-----------|
| PLRGT | 8     | 125      | 1         |
| PLRGT | 6     | 150      | 1         |



## PLRBT

Polyurethane velcro backing-pad, semi-soft, 15 suction holes, 150 mm. diameter, screw fixing 5/16''.

| ITEM  | HOLES | SIZE mm. | PACKAGING |
|-------|-------|----------|-----------|
| PLRBT | 15    | 150      | 1         |



## PLRKT

Polyurethane velcro backing-pad, rigid, 15 suction holes, 150 mm. diameter, screw fixing 5/16''.

| ITEM  | HOLES | SIZE mm. | PACKAGING |
|-------|-------|----------|-----------|
| PLRKT | 15    | 150      | 1         |



## PLR

Velcro foam rubber pad, 8 suction holes.  
Passing screw 5/16''.

| ITEM | HOLES | SIZE mm. | PACKAGING |
|------|-------|----------|-----------|
| PLR  | 8     | 125      | 1         |
| PLR  | 15    | 150      | 1         |



## PLS

Velcro rubber backing pad, 14 MA thread.

## P-TR

Adapter pin for drills.

| ITEM | SIZE mm. | PACKAGING |
|------|----------|-----------|
| PLS  | 115      | 1         |
| PLS  | 125      | 1         |
| PLS  | 150      | 1         |
| P-TR | -        | 1         |

## PLSR

Hard velcro plastic backing pad, 14 MA thread.

| ITEM | SIZE mm. | PACKAGING |
|------|----------|-----------|
| PLSR | 115      | 1         |
| PLSR | 125      | 1         |
| PLSR | 150      | 1         |

## PLRM

Velcro foam rubber pad, 14 MA thread.

| ITEM | SIZE mm. | PACKAGING |
|------|----------|-----------|
| PLRM | 200      | 1         |

## PLDF

Nylon backing pad for fibre discs, hole 22 mm.

| ITEM | SIZE mm. | PACKAGING |
|------|----------|-----------|
| PLDF | 115      | 1         |
| PLDF | 125      | 1         |
| PLDF | 178      | 1         |





# VELCRO PADS



## VA

Spare self-adhesive velcro pad.

| ITEM | HOLES | SIZE mm. | PACKAGING |
|------|-------|----------|-----------|
| VA   | 8     | 127      | 25        |
| VA   | -     | 150      | 25        |
| VA   | 6     | 150      | 25        |
| VA   | 9     | 150      | 25        |
| VA   | 15    | 150      | 25        |
| VA   | 10    | 115X228  | 10        |
| VA   | -     | 230X1300 | 1         |



## SPDR

Foam velcro pad. Thickness 5 mm..

### APPLICATIONS:

Disc-holder pad making the pad softer where a high quality finish is required.

| ITEM | HOLES | SIZE mm. | PACKAGING |
|------|-------|----------|-----------|
| SPDR | 15    | 150      | 1         |
| SPDR | 10    | 115X228  | 1         |



## SP

Velcro pad.

### APPLICATIONS:

Velcro adapter for pad protection.

| ITEM | HOLES     | SIZE mm. | PACKAGING |
|------|-----------|----------|-----------|
| SP   | 8         | 127      | 1         |
| SP   | multihole | 150      | 1         |
| SP   | 10        | 115X228  | 1         |

## TRVEL


Velcro polishing pad.

### APPLICATIONS:

For polishing all lacquered surfaces (boat, automotive and furniture industry).

Thickness 55 mm..

| ITEM   | TYPE           | SIZE mm. | PACKAGING |
|--------|----------------|----------|-----------|
| TRVELM | Soft (yellow)  | 160      | 1         |
| TRVELR | Rigid (orange) | 160      | 1         |
| TRVELM | Soft (yellow)  | 200      | 1         |
| TRVELR | Rigid (orange) | 200      | 1         |

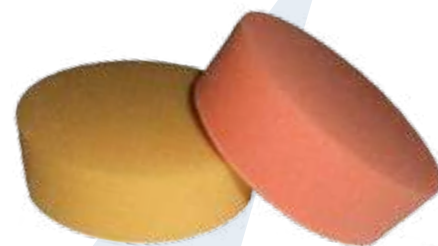

## TRVEL B


Velcro corrugated pad.

### APPLICATIONS:

For polishing all lacquered surfaces (boat, automotive and furniture industry).

Corrugated to facilitate the pad cooling during the polishing operations.

| ITEM    | TYPE           | SIZE mm. | PACKAGING |
|---------|----------------|----------|-----------|
| TRVELMB | Soft (black)   | 160      | 1         |
| TRVELRB | Rigid (orange) | 160      | 1         |
| TRVELMB | Soft (black)   | 200      | 1         |
| TRVELRB | Rigid (orange) | 200      | 1         |

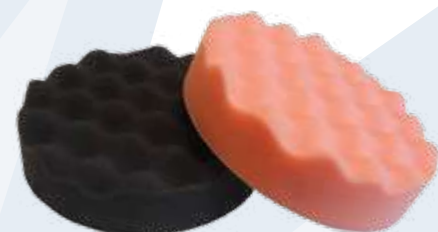

## CLA

Velcro lambswool pad.

### APPLICATIONS:

Suitable for polishing with abrasive pastes.

| ITEM | SIZE mm. | PACKAGING |
|------|----------|-----------|
| CLA  | 77       | 5         |
| CLA  | 150      | 5         |
| CLA  | 180      | 5         |



**TM D** Double density (hard-soft).

## TM

Velcro foam rubber hand pad.

| ITEM | SIZE mm. | PACKAGING |
|------|----------|-----------|
| TM D | 70X120   | 1         |
| TM   | 70X120   | 1         |

